

6-30-00

A

06/29/00
30633 U.S. PTO

NEW, CONTINUATION, DIVISIONAL OR
CONTINUATION-IN-PART APPLICATION
UNDER 37 C.F.R. §1.53(b)

Attorney Docket No. 9319S0073COA
Express Mail Label No. EL 581 365 926 US
Date June 29, 2000

30633 U.S. PTO
09/607017
06/29/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Hon. Commissioner of Patents and Trademarks
Washington, D. C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R §1.53(b) is a patent application for DISPLAY DEVICE
AND ELECTRONIC APPARATUS EMPLOYING THE SAME

identified by: [] First named inventor Chiyoaki IJIMA
or [X] Attorney Docket No. (see above)

1. Type of Application

- [] This application is a new (non-continuing) application.
- [X] This application is a [X] continuation / [] divisional / [] continuation-in-part of prior application No. 09/157,255. Amend the specification by inserting before the first line the sentence:

--This is a continuation of United States patent application No. 09/157,255,
filed September 18, 1998.--

- [X] The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

If for some reason applicant has not requested a sufficient extension of time in the parent application, and/or has not paid a sufficient fee for any necessary response in the parent application and/or for the extension of time necessary to prevent the abandonment of the parent application prior to the filing of this application, please consider this as a Request for an Extension for the required time period and/or authorization to charge our Deposit Account No. 08-0750 for any fee that may be due. THIS FORM IS BEING FILED IN TRIPLICATE: one copy for this application; one copy for use in connection with the Deposit Account (if applicable); and one copy for the above-mentioned parent application (if any extension of time is necessary).

2. Contents of Application

- a. [X] Specification of 30 pages;
 - [] A microfiche computer program (Appendix);
 - [] A nucleotide and/or amino acid sequence submission;
- [] Because the enclosed application is in a non-English language, a verified English translation [] is enclosed [] will be filed.
- [X] Cancel original claims 2-21 of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing date purposes.)
- b. [X] Drawings on 13 sheets;

Attorney Docket No. 9319S0073COA

Express Mail Label No. EL 581 365 926 US

Date June 29, 2000

- c. ☒ A signed Oath/Declaration ☒ is enclosed / ☐ will be filed in accordance with 37 C.F.R. §1.53(f).

The enclosed Oath/Declaration is ☐ newly executed / ☒ a copy from a prior application under 37 C.F.R. §1.63(d) / ☐ accompanied by a statement requesting the deletion of person(s) not inventors in the continuing application.

d. **Fees**

| FILING FEE | Number | Number | | Basic Fee |
|--|-----------|--------|------------|---------------|
| CALCULATION | Filed | Extra | Rate | \$690.00 |
| Total Claims | 11 - 20 = | 0 x | \$18.00 = | 0.00 |
| Independent Claims | 3 - 3 = | 0 x | \$78.00 = | 0.00 |
| Multiple Dependent Claim(s) Used | | | \$260.00 = | |
| FILING FEE - NON-SMALL ENTITY | | | | 690.00 |
| FILING FEE - SMALL ENTITY: Reduction by 1/2 | | | | |
| <input type="checkbox"/> Verified Statement under 37 C.F.R. §1.27 is enclosed. | | | | |
| <input type="checkbox"/> Verified Statement filed in prior application. | | | | |
| Assignment Recordal Fee (\$40.00) | | | | |
| 37 C.F.R. §1.17(k) Fee (non-English application) | | | | |
| TOTAL | | | | 690.00 |

- ☒ A check is enclosed to cover the calculated fees. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to Deposit Account No. 08-0750. A duplicate copy of this document is enclosed.

- ☐ The calculated fees will be paid within the time allotted for completion of the filing requirements.

- ☐ The calculated fees are to be charged to Deposit Account No. 08-0750. The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment, to said Deposit Account. A duplicate copy of this document is enclosed.

3. **Priority Information**

- ☒ **Foreign Priority:** Priority based on Japanese Application Nos. 9-253972, filed September 18, 1997, 10-16242, filed January 28, 1998 and 10-206784, filed July 22, 1998 is claimed.

☒ copy of the above referenced priority documents ☒ were filed in the parent case/ ☐ is enclosed / ☐ will be filed in due course, pursuant to 35 U.S.C. §119(a)-(d).

- ☐ **Provisional Application Priority:** Priority based on United States Provisional Application No. _____, filed _____, is claimed under 35 U.S.C. §119(e).

Attorney Docket No. 9319S0073COA
Express Mail Label No. EL 581 365 926 US
Date June 29, 2000

4. **Other Submissions**

☒ A Preliminary Amendment is enclosed.

☒ An Information Disclosure Statement, 1 sheet of PTO Form 1449, 1 sheet of PTO Form 892 and 0 patents are enclosed.

☒ A power of attorney

☐ is submitted ☐ with the new Oath/Declaration.

☒ is of record in the prior application and ☐ is in the original papers / ☒ a copy is enclosed.

☒ An Assignment of the invention

☐ is enclosed with a cover sheet pursuant to 37 C.F.R. §§3.11, 3.28 and 3.31.

☒ is of record in a prior application. The assignment is to Seiko Epson Corporation, and is recorded at Reel 9601, Frame 0789.

☐ An Establishment of Assignee's Right To Prosecute Application Under 37 C.F.R. §3.73(b), and Power Of Attorney is enclosed.

☒ An Express Mailing Certificate is enclosed.


☐ Other: _____

Attention is directed to the fact that the correspondence address for this application is:

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600.

Respectfully,

Date June 29, 2000
Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303
(248) 641-1600

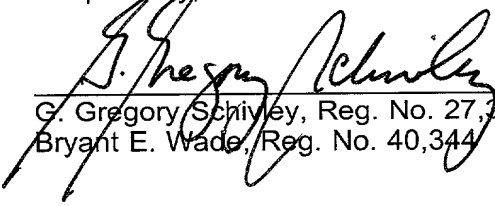

G. Gregory Schivley, Reg. No. 27,382
Bryant E. Wade, Reg. No. 40,344

HARNES, DICKEY & PIERCE, P.L.C.
ATTORNEYS AND COUNSELORS
P.O. BOX 828
BLOOMFIELD HILLS, MICHIGAN 48303
U.S.A.

TELEPHONE
(248) 641-1600
TELEFACSIMILE
(248) 641-0270



Date: June 29, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:


EXPRESS MAILING CERTIFICATE

Applicant: Chiyoaki IJIMA
Serial No. (if any): Unknown
Filed: Unknown
For: **DISPLAY DEVICE AND ELECTRONIC APPARATUS EMPLOYING
THE SAME**
Docket: 9319S0073COA
Attorney: GGS/BEW

"Express Mail" Mailing Label Number **EL 581 365 926 US**

Date of Deposit **June 29, 2000**

I hereby certify and verify that the accompanying acknowledgement postcard, check for \$690.00, Transmittal Letter for filing continuation under 37 C.F.R. Section 1.53(b) (in triplicate), copy of 30-page patent application (from parent file), 13 sheets of drawings showing Figures 1-15 (parent file), copy of executed Declaration and Power of Attorney (parent file), Information Disclosure Statement, copy of Form PTO-1449 (parent file), Form PTO-892 (parent file), Preliminary Amendment and this certificate are being deposited with the United States Postal Service "Express Mail Post Office To Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is (are) addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.


Michele S. Mester
Signature of Person Mailing Document(s)

006290" 27020960

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Chiyoaki IJIMA)
Examiner: Unknown) **PRELIMINARY**
Filed: Herewith) **AMENDMENT**
For: **DISPLAY DEVICE AND ELECTRONIC)
APPARATUS EMPLOYING THE SAME)**

Hon. Commissioner of Patents & Trademarks
Washington, D.C. 20231

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on

By _____
Aug 29, 2000
[Signature]

Sir:

Prior to the examination of this application, please amend it as follows:

IN THE CLAIMS

Please cancel Claim 1.

Please add the following new claims:

22. (NEW) A display device comprising:

a polarization axis varying device,

a first polarizing splitter device disposed on one side of said polarization axis varying device and which transmits a light ray component linearly polarized in a first direction while reflecting or absorbing a light ray component linearly polarized in a predetermined direction different from said first direction;

a second polarizing splitter device, disposed on the other side of said

09607017 062500
005290 7F020960

polarization axis varying device and which reflects a light ray component linearly polarized in a second direction while transmitting a light ray component linearly polarized in a predetermined direction different from said second direction; and

a lighting device disposed on the side of said second polarizing splitter device opposite to said polarization axis varying device,

wherein said lighting device has a light diffusing device at a surface thereof, said light diffusing device diffusing and reflecting a light ray coming in from said second polarizing splitter device, while transmitting a light ray coming from said lighting device toward said second polarizing splitter device.

23. (NEW) A display device according to Claim 22, further comprising a light reflective device, disposed on the side of said lighting device opposite to said light diffusing device, for reflecting a light ray coming in from said lighting device,

wherein said lighting device transmits a light ray coming in from said light diffusing device toward said light reflective device, while transmitting a light ray coming in from said light reflective device toward said light diffusing device.

24. (NEW) A display device according to Claim 23, wherein said light reflective device emits a light ray.

25. (NEW) A display device according to Claim 23, wherein said light reflective device emits a color light ray.

26. (NEW) A display device according to Claim 22, further comprising a light exit angle control device, disposed between said second polarizing splitter device and said light diffusing device, for outputting a light ray at an exit angle within a predetermined range when receiving a light ray.

27. (NEW) A display device according to Claim 22, further comprising a light exit angle control device, disposed between said lighting device and said light diffusing device, for outputting a light ray at an exit angle within a predetermined range when receiving a light ray.

28. (NEW) A display device according to Claim 22, further comprising a third polarizing splitter device disposed between said lighting device and said light diffusing device and which reflects a light ray component linearly polarized in a third direction, while transmitting a light ray component linearly polarized in a predetermined direction different from said third direction.

29. (NEW) A display device according to Claim 28, wherein said second polarizing splitter device and said third polarizing splitter device are disposed such that said second direction and said third direction are different from each other.

30. (NEW) A display device comprising:
a liquid-crystal display panel having a liquid crystal interposed between a pair of substrates;
a polarizer disposed on one side of said liquid-crystal display panel;
a first reflective polarizer disposed on the other side of said liquid-

crystal display panel; and

a lighting apparatus disposed on the side of said first reflective polarizer opposite to the polarizer;

wherein said lighting apparatus includes a light diffuser at a surface thereof, said light diffuser diffusing and reflecting a light ray coming in from said first reflective polarizer, while transmitting a light ray coming in from said lighting apparatus toward said first reflective polarizer.

31. (NEW) A display device according to Claim 30, further comprising a reflector on the side of said light diffuser opposite to said lighting apparatus, wherein said lighting apparatus comprises a light source and a substantially transparent light guide.

32. (NEW) An electronic apparatus having a display device with a liquid-crystal display panel as a display unit, said display device comprising:

a liquid-crystal display panel having a liquid crystal interposed between a pair of substrates;

a polarizer disposed on one side of said liquid-crystal display panel;

a first reflective polarizer disposed on the other side of said liquid-crystal display panel; and

a lighting apparatus disposed on the side of said first reflective polarizer opposite to the polarizer;

wherein said lighting apparatus includes a light diffuser at a surface thereof, said light diffuser diffusing and reflecting a light ray coming in from said first reflective polarizer, while transmitting a light ray coming in from said lighting apparatus

toward said first reflective polarizer.

REMARKS

The purpose of these new claims is to provide Applicant with a scope of protection commensurate with its contribution to the art.


Favorable consideration of this application is respectfully requested.

Respectfully submitted,

Date: June 29, 2000

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, MI 48303
(248) 641-1600
GGS/BEW/msm

By: _____

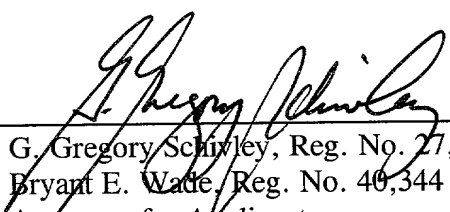
G. Gregory Schirley, Reg. No. 27,382
Bryant E. Wade, Reg. No. 40,344
Attorneys for Applicant

006290 21020950

**DISPLAY DEVICE AND ELECTRONIC
APPARATUS EMPLOYING THE SAME**

1. Technical Field

The present invention relates to a display device and an electronic apparatus. More particularly, the present invention relates to a transfective display device having two modes of display.

2. Discussion

Since a conventional display device employing TN (Twisted Nematic) liquid crystal or STN (Super-Twisted Nematic) liquid crystal adopts the structure of a liquid-crystal display panel sandwiched between two polarizers, the utilization of light is poor. A transfective display device in particular suffers dark display during a reflective display mode.

Referring to FIG. 14, a conventional transfective liquid-crystal display device using a TN liquid-crystal display panel is now discussed. Referring to FIG. 14, there are shown an upper polarizer 130, a TN liquid-crystal display panel 140, a lower polarizer 170, a transfective plate 180, and a light source 210. Although FIG. 14 shows the components spaced apart from each other, they actually closely adhere to one another.

Discussed now is how white color is presented during a reflective display mode. A light ray 111 is linearly polarized in a direction parallel with the page bearing FIG. 14 by the upper polarizer 130, is twisted in a polarization direction 90° by the TN liquid-crystal display panel 140, becoming a light ray linearly polarized in a direction perpendicular to the page, and is then transmitted through the lower polarizer 170. Part of the light ray transmitted through the lower polarizer 170 is reflected by the transfective plate 180, and is again transmitted through the lower polarizer 170. The light ray is then twisted in a polarization

direction 90° by the TN liquid-crystal display panel 140 and is thus linearly polarized in a direction parallel with the page, and is then transmitted through the upper polarizer 130.

Because of its light absorbing feature, the lower polarizer 170 partly absorbs the light ray. This lowers the utilization of light, presenting a dark display during the reflective display mode.

In an effort to resolve this problem, we have proposed a transfective display device (see Japanese Patent Application No. 8-245346) in which the lower polarizer 170 is replaced with a reflective polarizer that reflects a light ray component linearly polarized in a predetermined direction while transmitting a light ray component linearly polarized in a direction perpendicular to the predetermined direction. Referring to FIG. 15, the transfective display device using this reflective polarizer is now discussed.

Referring to FIG. 15, there are shown a non-voltage applied area 605 of the TN liquid-crystal display panel and a voltage applied area 606 of the TN liquid-crystal display panel. There are also shown the upper polarizer 130, an upper glass substrate 302, a lower glass substrate 304, a reflective polarizer 160, a transmissive-absorbent layer 307, and a lighting apparatus 210.

The principle of the reflective display mode is now discussed. A light ray 601, which is linearly polarized in a direction parallel with the page by the upper polarizer 130, is twisted in a polarization direction 90° by the non-voltage applied area 605 of the TN liquid-crystal display panel, thereby becoming a light ray linearly polarized in a direction perpendicular to the page. The light ray is then reflected by the reflective polarizer 160, and is twisted in a polarization direction 90° by the non-voltage applied area 605 of the TN liquid-crystal display panel, thereby becoming a light ray linearly polarized in a direction parallel with the page. The light ray is then transmitted through the upper polarizer 130. When no voltage is applied

to the TN liquid-crystal panel, a white display is thus presented.

On the other hand, a light ray 603, which is linearly polarized in a direction parallel with the page by the upper polarizer 130, is transmitted through the voltage applied area 606 of the TN liquid-crystal display panel without any change in a polarization direction, and is transmitted through the reflective polarizer 160. The light ray is then absorbed by the transmissive-absorbent layer 307. A black display is thus presented when a voltage is applied to the TN liquid-crystal display panel.

During the transmissive display mode, a light ray 602 emitted from the lighting apparatus 210 passes through an aperture formed in the transmissive-absorbent layer 307, and is linearly polarized in a direction parallel with the page by the reflective polarizer 160. The light ray is then twisted in a polarization direction 90° by the non-voltage applied area 605 of the TN liquid-crystal display panel, thereby becoming a light ray linearly polarized in a direction perpendicular to the page, and is absorbed by the upper polarizer 130. A black display is thus presented when no voltage is applied to the TN liquid-crystal display panel.

A light ray 604 emitted from the lighting apparatus 210 passes through an aperture formed in the transmissive-absorbent layer 307, and is linearly polarized in a direction parallel with the page by the reflective polarizer 160. The light ray is then transmitted through the voltage applied area 606 of the TN liquid-crystal display panel with no change in a polarization direction, and is transmitted through the upper polarizer 130. A white display is thus presented when a voltage is applied to the TN liquid-crystal display panel.

In the transflective display device using such a reflective polarizer, a positive-negative relationship is reversed between the display in the reflective display mode and the display in the transmissive display mode. For this reason, a user has difficulty watching a display with the lighting apparatus 210 lit under an external light, and the display under such conditions

is not adequate depending on the purpose of use.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a display device that is free from a positive-negative reversal between the reflective display mode and the transmissive display mode. It is another object of the present invention to provide an electronic apparatus employing such a display device.

The above and other objects are provided by a display device includes a reflective polarizer beneath a liquid-crystal display panel, and a light diffusing plate and a lighting apparatus disposed beneath the reflective polarizer. In a reflective display mode, the display device presents a specular display resulting from a light ray reflected by the reflective polarizer and a diffusion display resulting from a diffused light. In a transmissive display mode, the display device presents a dark display and a diffusion display caused by the light diffusing plate.

The present invention works on the above principle, and comprises polarization axis varying means, first polarizing splitter means disposed on one side of the polarization axis varying means which transmits a light ray component linearly polarized in a first direction while reflecting or absorbing a light ray component linearly polarized in a predetermined direction different from the first direction, second polarizing splitter means disposed on the other side of the polarization axis varying means which reflects a light ray component linearly polarized in a second direction while transmitting a light ray component linearly polarized in a predetermined direction different from the second direction, lighting means disposed on the side of the second polarizing splitter means opposite to the polarization axis varying means, and light diffusing means disposed between the second polarizing splitter means and the

lighting means which diffuses and reflects a light ray coming in from the second polarizing splitter means, while transmitting a light ray coming from the lighting means toward the second polarizing splitter means.

BRIEF DESCRIPTION OF THE DRAWINGS

5 FIG. 1 is a perspective view of a reflective polarizer.

FIG. 2 illustrates the principle of a reflective display mode of the display device of the present invention.

FIG. 3 illustrates the principle of a transmissive display mode of the display device of the present invention.

10 FIG. 4 is an exploded, cross-sectional view showing a transflective display device of a first embodiment of the present invention.

FIG. 5 is an explanatory view showing a lighting apparatus used in the display device of the first embodiment of the present invention.

15 FIG. 6 shows the surface configuration of a light guide used in the display device of the first embodiment of the present invention.

FIG. 7 is an exploded, cross-sectional view showing the display device of a second embodiment of the present invention.

20 FIG. 8 illustrates the relationship between the polarization axis of the reflective polarizer 40 and the polarization axis of the reflective polarizer 60, both used in the display device of the second embodiment of the present invention.

FIG. 9 is an exploded, cross-sectional view showing the display device of a third embodiment of the present invention.

FIG. 10 is an exploded, cross-sectional view showing the display device of a fourth

embodiment of the present invention.

FIG. 11 is an exploded, cross-sectional view showing the display device of a fifth embodiment of the present invention.

FIG. 12 illustrates the function of exit angle control means used in the third and fourth embodiments of the present invention.

FIG. 13 is a perspective view showing an electronic apparatus of the present invention.

FIG. 14 is a cross-sectional view of a conventional transfective display device employing a structure in which a liquid crystal is sandwiched between a pair of polarizers.

FIG. 15 is a cross-sectional view showing a conventional transfective display device employing a reflective polarizer.

DETAILED DESCRIPTION OF THE DRAWINGS

The principle of the present invention is now discussed referring to FIG. 1, FIG. 2 and FIG. 3. FIG. 1 is a perspective view of a reflective polarizer which is used as polarizing splitter means. FIG. 4 illustrates the principle of display when an external light enters the display device of the present invention, and FIG. 5 is an explanatory view illustrating the principle of display when a light source lights.

Referring to FIG. 1, the reflective polarizer 160 has a structure in which two different types of layers, layer 1 (A layer) and layer 2 (B layer), are alternately laminated. A refractive index (n_{AX}) of the A layer 1 in the X direction is different from a refractive index (n_{AY}) in the Y direction. The refractive index (n_{AY}) of the A layer 1 in the Y direction is approximately equal to a refractive index (n_{BY}) of the B layer 2 in the Y direction.

The light ray component linearly polarized in the Y direction, out of the light ray

incident at a right angle on a top surface 5 of the reflective polarizer 160, is transmitted through the reflective polarizer 160, and then exits from a bottom surface 6 as a light ray linearly polarized in the Y direction. Conversely, the light ray component linearly polarized in the Y direction, out of the light ray incident at a right angle on the bottom surface 6 of the reflective polarizer 160, is transmitted through the reflective polarizer 160, and exits from the top surface 5 as a light ray linearly polarized in the Y direction. The Y direction is called a polarization axis.

Let t_A represent the thickness of the A layer 1 in the Z direction, t_B represent the thickness of the B layer 2 in the Z direction, and λ represent the wavelength of an incident light.

$$t_A n_{AX} + t_B n_{BX} = \lambda/2 \quad (1)$$

With the above equation established, the light ray component linearly polarized in the X direction, out of the light ray, having a wavelength λ , incident at a right angle on the top surface 5 of the reflective polarizer 160 is reflected by the reflective polarizer 160 as a light ray linearly polarized in the X direction. The linearly polarized light ray having a wavelength λ incident on the bottom surface 6 is reflected by the reflective polarizer 160 as a light ray linearly polarized in the X direction. The X direction is called a reflection axis.

Equation (1) holds on the entire visible-light wave range by varying the thickness t_A of the A layer 1 in the Z direction and the thickness of t_B of the B layer 2 in the Z direction. This arrangement provides a reflective polarizer which reflects a light ray linearly polarized in the X direction as a light ray linearly polarized in the X direction while transmitting a light ray linearly polarized in the Y direction as a light ray linearly polarized in the Y direction, not only in a single color but also in a white color light.

Stretched polyethylene naphthalate (PEN) is used for the A layer and copolyester of

naphtalen dicarboxylic acid and terephthalic or isothalic acid (coPEN) is used for the B layer in the reflective polarizer 160. The materials of the reflective polarizer of the present invention are not limited to these materials, and any appropriate materials may be selected. Such a reflective polarizer is disclosed in detail in Japanese Unexamined Patent Publication
5 No. 9-506985(toku-hyo-hei 9-506985).

FIG. 2 illustrates the display device of the present invention under the presence of an external light. The display device employs the TN liquid-crystal display panel 140 as polarization axis varying means. The upper polarizer 130 is disposed on top of the TN liquid-crystal display panel 140. Arranged beneath the TN liquid-crystal display panel 140 are the reflective polarizer 160, a light diffusing layer 150, a light source 190 and a reflective layer 200 in that order from below. The polarization axis of the polarizer 130 is perpendicular to the polarization axis of the reflective polarizer 160.

In a voltage applied area 120 on the right-hand side, a natural ambient light 121 is linearly polarized in a direction parallel with the page by the polarizer 130, and is then transmitted through the TN liquid-crystal display panel 140 with no change in polarization direction. The light ray is then reflected by the reflective polarizer 160, as a light ray linearly polarized in a direction parallel with the page, is transmitted through the TN liquid-crystal display panel 140 with no change in polarization direction, and then exits from the polarizer 130. Since the reflective polarizer 160 reflects light in a specular reflection fashion, the
20 display device presents a bright display on screen only when the light ray reflected from the reflective polarizer is seen at a right viewing angle to a screen. The display device presents a dark display on screen when the light ray reflected from the reflective polarizer is viewed at viewing angles other than the right angle to the screen.

In a non-voltage applied area 110 on the left-hand side, a natural ambient light 111

is linearly polarized in a direction parallel with the page by the polarizer 130, and is twisted in a polarization direction 90° by the TN liquid-crystal display panel 140, becoming a light ray linearly polarized in a direction perpendicular to the page. The light ray is then transmitted through the reflective polarizer 160, and is partly transmitted through the light diffusing layer 150. The light ray transmitted through the light diffusing layer 150 is reflected by the reflective layer 200, is again transmitted through the light diffusing layer 150, and exits toward the reflective polarizer. Part of the light ray transmitted through the reflective polarizer 160 is diffused through and reflected by the light diffusing layer 150, and then exits toward the reflective polarizer 160. The light ray linearly polarized in a direction perpendicular to the page, exiting to the reflective polarizer and transmitted again through the reflective polarizer 160, is twisted in a polarization direction 90° by the TN liquid-crystal display panel 140, becoming a light ray linearly polarized in a direction parallel with the page, and is then transmitted through the polarizer 130. Since the light ray transmitted through the polarizer 130 is a light ray diffused through the light diffusing layer 150, it is white in all directions.

In the voltage applied area 120, the light reflected by the reflective polarizer 160 is an exiting light ray 122, while in the non-voltage applied area 110, the light transmitted through the reflective polarizer 160 is an exiting light 112, which looks white from all directions, as a result of a diffusion action by the light diffusing layer 150. Under the external light, the display device presents a positive with a dark (black) display with a white background in almost all directions. However, a positive with a specular display with a white background is obtained in the reflection direction of the light ray reflected by the reflective polarizer.

Referring to FIG. 3, the liquid-crystal display device remains unchanged from the one

shown in FIG. 2. In the voltage applied area 120 on the right-hand side, a light ray component aligned with the polarization direction of the reflective polarizer 160, out of a light ray 125 from a light source, is transmitted through the reflective polarizer 160 as a light ray linearly polarized in a direction perpendicular to the page. The light ray transmitted through the reflective polarizer 160 is then transmitted through the TN liquid-crystal display panel 140 with no change in polarization direction, and is absorbed by the polarizer 130. The resulting display thus appears black.

In the non-voltage applied area 110 on the left-hand side, a light ray component aligned with the polarization direction of the reflective polarizer 160, out of a light ray 115 from the light source, is transmitted through the reflective polarizer 160 as a light ray linearly polarized in a direction perpendicular to the page. The light ray transmitted through the reflective polarizer 160 is then twisted in a polarization direction 90° by the TN liquid-crystal display panel, becoming a light ray linearly polarized in a direction parallel with the page, and is then transmitted through the polarizer 130.

With the light source lit, the voltage applied area 120 presents a dark display as a result of light absorption through the polarizer 130 while the non-voltage applied area 110 presents a light display as a result of light transmission through the polarizer 130. A black positive with a light source color background is presented when the light source 190 lights. In conclusion, a positive display is presented regardless of whether the display device is under the external light or with the light source lit.

The voltage applied area and the non-voltage applied area may be reversed in presentation by rotating the polarization axis of the polarizer 130 by 90° . In this case, a negative display is presented regardless of whether the display device is under the external light or with the light source lit.

In the above discussion, the TN liquid-crystal display panel 140 is employed. The basic principle of the present invention remains unchanged even if another liquid-crystal display with its polarization axis varied by a voltage or the like, such as an STN liquid-crystal display panel or ECB (Electrically Controlled Birefringence) liquid-crystal display panel, is alternatively employed.

The present invention works on the above principle, and comprises polarization axis varying means, first polarizing splitter means disposed on one side of the polarization axis varying means which transmits a light ray component linearly polarized in a first direction while reflecting or absorbing a light ray component linearly polarized in a predetermined direction different from the first direction, second polarizing splitter means disposed on the other side of the polarization axis varying means which reflects a light ray component linearly polarized in a second direction while transmitting a light ray component linearly polarized in a predetermined direction different from the second direction, lighting means disposed on the side of the second polarizing splitter means opposite to the polarization axis varying means, and light diffusing means disposed between the second polarizing splitter means and the lighting means which diffuses and reflects a light ray coming in from the second polarizing splitter means, while transmitting a light ray coming from the lighting means toward the second polarizing splitter means.

Used for the polarization axis varying means is a liquid-crystal display panel, and preferably, a TN liquid-crystal display panel, an STN liquid-crystal display panel, or an ECB liquid-crystal display panel. The STN liquid-crystal display panels include the type employing an optically anisotropic material for color correction. Preferably, the polarizer is used for the first polarizing splitter means and the reflective polarizer described with reference to FIG. 3 is used for the second polarizing splitter means. The reflective polarizer described with

reference to FIG. 3 may be used for the first polarizing splitter means.

Preferably used for the lighting means is a lighting apparatus including a light source as a light emitting body and a light guide plate for outputting a light from the light source toward the light diffusing means. The light diffusing means needs to transmits the light coming in from the lighting means toward the second polarizing splitter means.

With the lighting means lit, namely, during the transmissive display mode, two display modes of dark and light displays are available depending on the state of the polarization axis of the polarization axis varying means: in the dark display mode (hereinafter simply referred to as dark display), the light ray from the lighting means is not transmitted through the first polarizing splitter means and in the light display mode (hereinafter referred to as diffusion display), the light ray from the light source is diffused through the light diffusing means and is then transmitted through the first polarizing splitter means.

Under the external light, namely, during the reflective display mode, two display modes of specular display and diffusion display are available depending on the state of the polarization axis of the polarization axis varying means: in the specular display mode (hereinafter referred to as specular display), the external light is reflected by the second polarizing and in the diffusion display mode (hereinafter referred to as diffusion display), the external light is diffused and reflected by the light diffusing means. To present the specular display, no diffusion layer is preferred in the optical path of the light reflected by the second polarizing splitter means. In the specular display, a light display is presented only when the light ray reflected by the second polarizing splitter means is viewed from the direction of reflection while a dark display is presented when the light ray reflected by the reflective polarizer is viewed from directions other than the direction of reflection. The specular display generally looks dark. On the other hand, the diffusion display looks light from all directions.

For this reason, a resulting contrast is free from any particular problem in presentation, though the two display modes make use of the exiting light from the polarizer.

In the above two display modes, the specular display in the reflective display mode corresponds to the dark display in the transmissive display mode, and the diffusion display in the reflective display mode corresponds to the diffusion display in the transmissive display mode. A transflective display device free from the reversal in the positive-negative relationship is thus provided.

In the above arrangement, the light diffusing means may emit a color light ray. Specifically, a polymeric film containing colored micro-pearl may be used for the light diffusing means.

The light diffusing means may emit a light ray. Specifically, a fluorescent plate may be used for the light diffusing means, and the diffusion display appears in a fluorescence color.

Provided on the side of the lighting means opposite to the light diffusing means is light reflective means for reflecting a light ray coming in from the lighting means. The lighting means transmits a light ray coming in from the light diffusing means toward the light reflective means, while transmitting a light ray coming in from the light reflective means toward the light diffusing means.

In the diffusion display during the reflective display mode, the external light is partly reflected by and partly transmitted through the light diffusing means. The light ray transmitted through the light diffusing means is transmitted through the lighting means, is reflected by the reflective means, and is again transmitted through the light diffusing means. For this reason, the diffusion display in the reflective display mode is even lighter. In the diffusion display during the transmissive display mode, the light ray component linearly

000290 " 062400 10
polarized in the second predetermined direction, out of the light ray from the lighting apparatus, transmitted through the light diffusing means, is reflected by the second polarizing splitter means, and the reflected light ray is again reflected by the light reflective means. As the light ray is repeatedly reflected and diffused, the light ray is partly varied in a polarization direction, and is then transmitted through the second polarizing splitter means. The light reflective means reflects a light ray that is reflected toward the lighting apparatus by the light diffusing means and a light ray component of the light ray emitted by the light source exiting toward the light reflective means. For this reason, the utilization of light is improved, presenting a lighter diffusion display in the transmissive display mode.

10
The light reflective means may emit a light ray or a color light ray. To emit a light ray, a fluorescent plate may be employed, and to emit a color light ray, a hologram may be employed. With this arrangement, the diffusion displays in the transmissive display mode and reflective display mode are colored, providing an easy-to-see feature to the display device.

15
Light exit angle control means for outputting a light ray at an exit angle within a predetermined range may be further arranged between the lighting means and the light diffusing means or between the second polarizing splitter means and the light diffusing means.

A film including a plurality of layers having different refractive indexes may be used for the light exit angle control means. Such a film is, for example, Lumisty Film (trade name) manufactured by SUMITOMO CHEMICAL CO., LTD.

20
Referring to FIG. 12, the exit angle control means is now discussed. Designated 1000 is a film in which a Lumisty Film is disposed on top of a light diffusing plate or a light reflector. A light ray 1001 is incident on the film 1000, and exits as a diffused light ray. The strongest light ray of the diffused light is now designated 1002. The incident angle θ_1 of the incident light ray 1001 is different from the exit angle of the exiting light ray 1002. When

a light ray is incident at an angle of θ_1 , the light ray reflected from the film exits at an exit angle of θ_2 . However, a light ray reflected by the second polarizing splitter means exits at an exit angle of θ_1 . With the device viewed at θ_2 , an increased contrast results.

Arranged between the lighting means and the light diffusing means is third polarizing splitter means which reflects a light ray component linearly polarized in a third direction, while transmitting a light ray component linearly polarized in a predetermined direction different from the third direction. Like the second polarizing splitter means, the third polarizing splitter means may be the reflective polarizer described with reference to FIG. 3. By arranging the second polarizing splitter means and the third polarizing splitter means with their polarization axes out of alignment, the light ray transmitted through the second polarizing splitter means is reflected by the third polarizing splitter means in the diffusion display in the reflective display mode. The diffused light ray transmitted through the first polarizing splitter means is increased, resulting in a lighter diffused display. An excessively large angle set between the polarization axis of the second polarizing splitter means and the polarization axis of the third polarizing splitter means makes it difficult for the light ray from the lighting apparatus to transmit through the second and third polarizing splitter means. The diffusion display in the transmissive display mode is thus darkened. If the angle between the two polarization axes is too small, most of the light ray transmitted through the second polarizing splitter means is also transmitted through the third polarizing splitter means, reducing the effect of lighting the diffusion display in the reflective display mode. The angle between the polarization axis of the second polarizing splitter means and the polarization axis of the third polarizing splitter means is preferably between 45° and 80° , and more preferably between 60° and 75° .

The reflective polarizer as the second polarizing splitter means or the third polarizing

splitter means is characterized by its laminate structure in which layers having birefringence and layers having no birefringence are alternately laminated. By adjusting the thickness of each layer in the lamination, a light ray in the visible-light wavelength region having one polarization direction is reflected and a light ray in the visible-light wavelength region having another polarization direction is transmitted therethrough, and the diffusion display appears white.

The electronic apparatus of the present invention comprises a display device with a liquid-crystal display panel as a display unit, wherein the display device comprises a liquid-crystal display panel having a liquid crystal interposed between a pair of substrates, a polarizer disposed on one side of the liquid-crystal display panel, a first reflective polarizer disposed on the other side of the liquid-crystal display panel, a lighting apparatus disposed on the side of the first reflective polarizer opposite to polarization axis varying means, and a light diffusing plate which, arranged between the first reflective polarizer and the lighting means, diffuses and reflects a light ray coming in from the first reflective polarizer while transmitting a light ray coming in from the lighting apparatus toward the first reflective polarizer.

With the above arrangement, the electronic apparatus of the present invention is free from the positive/negative reversal.

The display device of the present invention finds applications in both a passive matrix addressing liquid-crystal display panel and an active matrix addressing liquid-crystal display panel in which the liquid crystal is addressed by thin-film transistors or thin-film diodes formed on a substrate.

Referring again to the drawings, the preferred embodiments of the present invention are now discussed. FIG. 4 is an exploded, cross-sectional view showing the display device of a first embodiment of the present invention. The display device of the first embodiment

is a transfective display device having two display modes, a reflective display mode and a transmissive display mode.

1005290 270990
15
A display device 10 of the first embodiment employs an STN liquid-crystal display panel 20 for the polarization axis varying means. A retardation film 14 and a polarizer 12 are laminated on the STN liquid-crystal display panel 20 in that order therefrom. Arranged beneath the STN liquid-crystal display panel 20 are a reflective polarizer 40 as the first polarizing splitter means, a light diffusing plate 30 as the light diffusing means, a lighting apparatus 70 as the lighting means, and a reflector 90 as the light reflective means in that order from below. The reflective polarizer described with reference to FIG. 1 may be used for the reflective polarizer 40. The reflective polarizer 40 has a thickness within a range of 50 to 200 μm , and is glued onto a glass substrate 22 using acrylic adhesive therebetween. The light diffusing plate 30 preferably has a haze value within a range of 5 to 85. A large haze value lowers the lightness on the screen while resulting in a large viewing angle. The light diffusing plate 30 may be a resin in which micro-particles are dispersed, and the resin is applied onto the surface of the reflective polarizer 40. A plastic film with aluminum or silver deposited thereon, or aluminum foil may be used for the reflector 90. The thickness of the reflector 90 is preferably within a range of 10 μm to 200 μm .

20
In the STN liquid-crystal display panel 20, an STN liquid crystal 26 fills a panel constructed of glass substrates 21 and 22 and sealing members 23. The thickness of each of the two glass substrates 21 and 22 is 2 mm or thinner. A transparent electrode 24 is attached on the underside of the glass substrate 21, and a transparent electrode 25 is attached on the top surface of the glass substrate 22. ITO (Indium Tin Oxide) or tin oxide may be used for the transparent electrodes 21 and 22. The retardation film 14 is used as a color correction, optically anisotropic material to correct coloration generated by the STN liquid-crystal display

panel 20. The lighting apparatus 70 employs an LED (Light Emitting Diode) 71, and projects light upward through a light guide 72.

The lighting apparatus 70 is constructed as shown in FIG. 5. The light guide 72 is made of polycarbonate or acrylic transparent plastic plate and has a width within a range of 0.3 mm to 2 mm, and has a number of dimples or projections on its surface. The dimples or projections, each having a size ranging from 10 μm to 200 μm , are spaced with a pitch of 20 μm to 400 μm . As shown, each projection or dimple may be a semispherical projection shown in FIG. 6(a), a conical dimple shown in FIG. 6(b), a semispherical dimple shown in FIG. 6(c), a circular column projection shown in FIG. 6(d), a circular column dimple shown in FIG. 6(e), or any other shape. The density of dimples or projections may be changed to provide a uniform surface luminance on the light guide 72. For its surface dimples or projections, the light guide 72 also serves as a light diffusing plate.

Preferably, the light guide has a small optical anisotropy. The presence of optical anisotropy tends to cause discoloration or irregular coloration in the display.

The operation of the transflective display device 10 of this embodiment is now discussed referring to FIG. 4. Under the external light, in a voltage applied area, the natural ambient light is linearly polarized in a predetermined direction by the polarizer 12, and is then twisted in a polarization direction a predetermined angle by the STN liquid-crystal display panel 20, and is then reflected by the reflective polarizer 40 rather than being absorbed. The light ray is then twisted in a polarization direction a predetermined angle by the STN liquid-crystal display panel 20, and exits from the polarizer 12 as a linearly polarized light ray. In the voltage applied area, the light ray is not absorbed but reflected by the reflective polarizer 40, presenting a specular display.

In a non-voltage applied area, the natural ambient light is linearly polarized in a

predetermined direction by the polarizer 12, and is then transmitted through the STN liquid-crystal display panel 20 as a linearly polarized light ray, and is transmitted through the reflective polarizer 40 as a linearly polarized light ray. The linearly polarized light ray thus transmitted is diffused by the light diffusing plate 30. A light ray component transmitted through the light diffusing plate 30 is reflected by the reflector 90, and is diffused by the light diffusing plate 30, and is transmitted through the STN liquid-crystal display panel 20 and polarizer 12, and exits as a linearly polarized light ray. Since the exiting light is a diffused light, it appears white.

The light ray reflected by the reflective polarizer 40 exits in a linearly polarized light ray featuring specularity in the voltage applied area while the light ray transmitted through the reflective polarizer 40 is thus diffused through the light diffusing plate 30 and then exits as a linearly polarized light ray presenting white color. With this arrangement, a specular display with a white background, namely, a dark display results.

With the light source lit, in a voltage applied area, the light ray emitted by the lighting apparatus 70 is transmitted through the reflective polarizer 40, and is then twisted in a polarization direction a predetermined angle by the STN liquid-crystal display panel 20 becoming a light ray linearly polarized in a predetermined direction, and is absorbed by the polarizer 12. The voltage applied area thus appears black.

In a non-voltage applied area, the light ray from the light source is transmitted through the reflective polarizer 40, and is then twisted in a polarization direction a predetermined angle by the STN liquid-crystal display panel 20 becoming a light ray linearly polarized in a predetermined direction, and is transmitted through the polarizer 12.

The light ray in the voltage applied area is absorbed by the polarizer 12, becoming dark while the light ray in the non-voltage applied area exits through the polarizer 12. A

black display is presented with the color of the exiting light ray from the lighting apparatus as the background color.

The light diffusing plate 30 may be colored to change the background color. When the polarizer 12 is replaced with a reflective polarizer having the same structure as that of the reflective polarizer 40, a light white display is presented under the external light because such reflective polarizer is unable to absorb light unlike the polarizer 12.

When a green hologram was employed for the reflector 90, the diffusion displays in both the reflective display mode and the transmissive display mode were green-colored at one viewing angle. When a prism sheet was employed for the reflector 90, a black display with a light background was presented at one viewing angle.

FIG. 7 is an exploded, cross-sectional view showing the display device of a second embodiment of the present invention. In the second embodiment, a reflective polarizer 60 as the third polarizing splitter means is arranged between the light diffusing plate 30 and the lighting apparatus 70. The rest of the construction of the second embodiment remains unchanged from that of the first embodiment, and the detailed description about it is not repeated here.

FIG. 8 illustrates the relationship between the polarization axis of the reflective polarizer 40 and the polarization axis of the reflective polarizer 60, wherein 41 designates the polarization axis of the reflective polarizer 40 and 61 designates the polarization axis of the reflective polarizer 60. In the second embodiment, the angle θ between the polarization axis 41 and the polarization axis 61 is 68° .

The study of the display of the display device in the second embodiment revealed that the diffusion display became lighter in the reflective display mode because the light ray transmitted through the reflective polarizer 40 was reflected by the reflective polarizer 60.

exit angle different from the light incident angle as shown in FIG. 12. This is because Lumisty Film has the following structure and characteristics. Lumisty Film contains layers having different refractive indexes, each having a thickness of 3 μm . This laminate structure causes light diffraction, diffusing light. By adjusting the laminate structure, the direction of the diffuse light is controlled. When an incident angle is 70° , an exit angle becomes 90° . Even when the screen of the device is viewed at a right angle and shadowed by a user, the screen is not darkened and remains light. With this arrangement, the device screen is easy to view with an increased contrast. A removal of the retardation film 14 resulted in a blue display with a bright yellow background.

FIG. 10 is an exploded, cross-sectional view of the liquid-crystal display device of a fourth embodiment of the present invention. In the fourth embodiment, Lumisty Film, manufactured by SUMITOMO CHEMICAL, CO., LTD, as the exit angle control means, was arranged between the lighting apparatus 70 and the reflector 90. The rest of the construction of the fourth embodiment remains unchanged from that of the first embodiment, and the detailed description about it is not repeated here.

With this arrangement, like the third embodiment, the screen is not darkened and remains light, and is easy to view with an increased contrast, even when the screen of the device is viewed at a right angle and shadowed by a user. When the light source is lit, the device screen is lighter than the one in the third embodiment.

FIG. 11 is an exploded, cross-sectional view of the display device of a fifth embodiment of the present invention. In the fifth embodiment, a fluorescent body 81 was arranged on the back surface of the lighting apparatus 70. The rest of the construction of the fifth embodiment remains unchanged from that of the first embodiment, and the detailed description about it is not repeated here.

With this arrangement, the fluorescent plate 81 is exposed to light both under the external light and with the light source lit, causing the screen to be light. The same effect results even if the fluorescent plate 81 is arranged between the lighting apparatus 70 and the reflective polarizer 40.

5 FIG. 13 shows the sixth embodiment of electronic apparatuses that incorporate the display device of the first embodiment. FIG. 13(a) shows a portable telephone, FIG. 13(b) shows a watch, FIG. 13(c) shows a personal computer. The electronic apparatuses of the sixth embodiment presented a bright display screen under daylight, shade, indoor and nighttime conditions. Any of the display devices of the first embodiment and third to fifth embodiments may be incorporated in the electronic apparatus of the sixth embodiment.

The display device of the present invention finds applications in a diversity of apparatuses, besides the above apparatuses, including home electronics, PDAs (Personal Digital Assistants), electronic pocketbooks, and calculators.

10 Under the external light, the display device of the present invention presents two display modes, namely the specular display mode resulting from the light ray reflected by the second polarizing splitter means and the diffusion display mode resulting from the diffused light ray from the light diffusing means, depending on the state of the polarization axis of the polarization axis varying means. In the specular display mode, the display screen is dark except for a viewing angle equal to the incident angle. In the diffusion display mode, the display screen is light in all directions. With the light source lit, the display device of the present invention presents the two display modes, namely, the dark display mode in which no light is transmitted through the first polarizing splitter means and the diffusion display mode resulting from the diffused light transmitted through the first polarizing splitter means, depending on the state of the polarization axis of the polarization axis varying means. The

transflective display device thus presents a light positive display during the reflective display mode and also presents a positive display during the transmissive display mode.

Preferably, the reflective means is disposed on the side of the light diffusing means opposite to the second polarizing splitter means. With this arrangement, the display screen is light both in the reflective display mode and the transmissive display mode.

5

006290" 27020960

CLAIMS

What is Claimed is:

1. A display device comprising:

polarization axis varying means;

first polarizing splitter means disposed on one side of said polarization axis
varying means which transmits a light ray component linearly polarized in a first direction
5 while reflecting or absorbing a light ray component linearly polarized in a predetermined
direction different from said first direction;

second polarizing splitter means disposed on another side of said
polarization axis varying means which reflects a light ray component linearly polarized in a
second direction while transmitting a light ray component linearly polarized in a
predetermined direction different from said second direction;

lighting means disposed on a side of said second polarizing splitter means
opposite to said polarization axis varying means; and

light diffusing means disposed between said second polarizing splitter
means and said lighting means which diffuses and reflects a light ray coming in from said
15 second polarizing splitter means, while transmitting a light ray coming from the said lighting
means toward said second polarizing splitter means.

2. A display device according to Claim 1, wherein said light diffusing means
emits a color light ray.

3. A display device according to Claim 1, wherein said light diffusing means
emits a light ray.

4. A display device according to Claim 1, further comprising light reflective means disposed on a side of said lighting means opposite to said light diffusing means for reflecting a light ray coming in from said lighting means, wherein said lighting means transmits a light ray coming in from said light diffusing means toward said light reflective means, while transmitting a light ray coming in from said light reflective means toward said light diffusing means.

5. A display device according to Claim 4, wherein said light reflective means emits a light ray.

6. A display device according to Claim 4, wherein said light reflective means emits a color light ray.

7. A display device according to Claim 1, further comprising light exit angle control means disposed between said second polarizing splitter means and said light diffusing means for outputting a light ray at an exit angle within a predetermined range when receiving a light ray.

8. A display device according to Claim 1, further comprising light exit angle control means disposed between said lighting means and said light diffusing means for outputting a light ray at an exit angle within a predetermined range when receiving a light ray.

9. A display device according to Claim 1, further comprising third polarizing splitter means disposed between said lighting means and said light diffusing means which reflects a light ray component linearly polarized in a third direction, while transmitting a light ray component linearly polarized in a predetermined direction different from said third direction.

10. A display device according to Claim 9, wherein said second polarizing splitter means and said third polarizing splitter means are disposed such that said second direction and said third direction are different from each other.

11. A display device comprising:
a liquid-crystal display panel having a liquid crystal interposed between a pair of substrates;
a polarizer disposed on one side of said liquid-crystal display panel;
a first reflective polarizer disposed on another side of said liquid-crystal display panel;
a lighting apparatus disposed on a side of said first reflective polarizer opposite to polarization axis varying means; and
a light diffusing plate disposed between said first reflective polarizer and said lighting means which diffuses and reflects a light ray coming in from said first reflective polarizer, while transmitting a light ray coming in from said lighting apparatus toward said first reflective polarizer.

12. A display device according to Claim 11, wherein said diffusing plate is a fluorescent plate.

13. A display device according to Claim 11, further comprising a reflector on a side of said light diffusing plate opposite to said lighting apparatus, wherein said lighting apparatus comprises a light source and a substantially transparent light guide.

14. A display device according to Claim 13, wherein said reflector is a hologram.

15. A display device according to Claim 13, wherein said reflector is a fluorescent plate.

16. A display device according to Claim 11, further comprising a film including a plurality of layers having different refractive indexes laminated together and disposed between said first reflective polarizer and said light diffusing plate.

17. A display device according to Claim 11, further comprising a film including a plurality of layers having different refractive indexes laminated together and disposed between said lighting apparatus and said light diffusing plate.

18. A display device according to Claim 11, further comprising a second reflective polarizer disposed between said light diffusing plate and said lighting apparatus.

19. A display device according to Claim 18, wherein said first reflective polarizer and said second reflective polarizer are arranged such that polarization axis of each polarizer is out of alignment with the other.

20. A display device according to Claim 11, wherein said first reflective polarizer is a laminate of a plurality of layers having birefringence and a plurality of layers having no birefringence in which one layer having birefringence and one layer having no birefringence are alternately laminated.

21. An electronic apparatus having a display device with a liquid-crystal display panel as a display unit, said display device comprising:

a liquid-crystal display panel having a liquid crystal interposed between a pair of substrates;

a polarizer disposed on one side of said liquid-crystal display panel;

a first reflective polarizer disposed on another side of said liquid-crystal display panel;

a lighting apparatus disposed on a side of said first reflective polarizer opposite to polarization axis varying means; and


a light diffusing plate disposed between said first reflective polarizer and said lighting means which diffuses and reflects a light ray coming in from said first reflective polarizer while transmitting a light ray coming in from said lighting apparatus toward said first reflective polarizer.

DISPLAY DEVICE AND ELECTRONIC APPARATUS EMPLOYING THE SAME

ABSTRACT


A display device includes a reflective polarizer beneath a liquid-crystal display panel, and a light diffusing plate and a lighting apparatus disposed beneath the reflective polarizer. In a reflective display mode, the display device presents a specular display resulting from a light ray reflected by the reflective polarizer and a diffusion display resulting from a diffused light. In a transmissive display mode, the display device presents a dark display and a diffusion display caused by the light diffusing plate.

FIG. 1

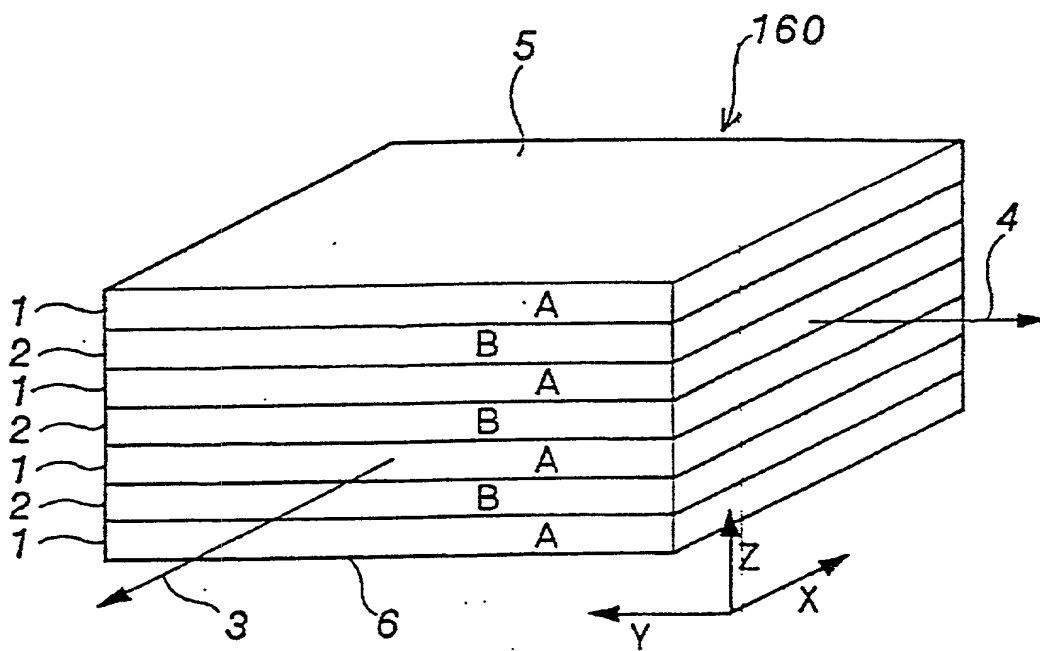

006290" 2T020960

FIG. 2

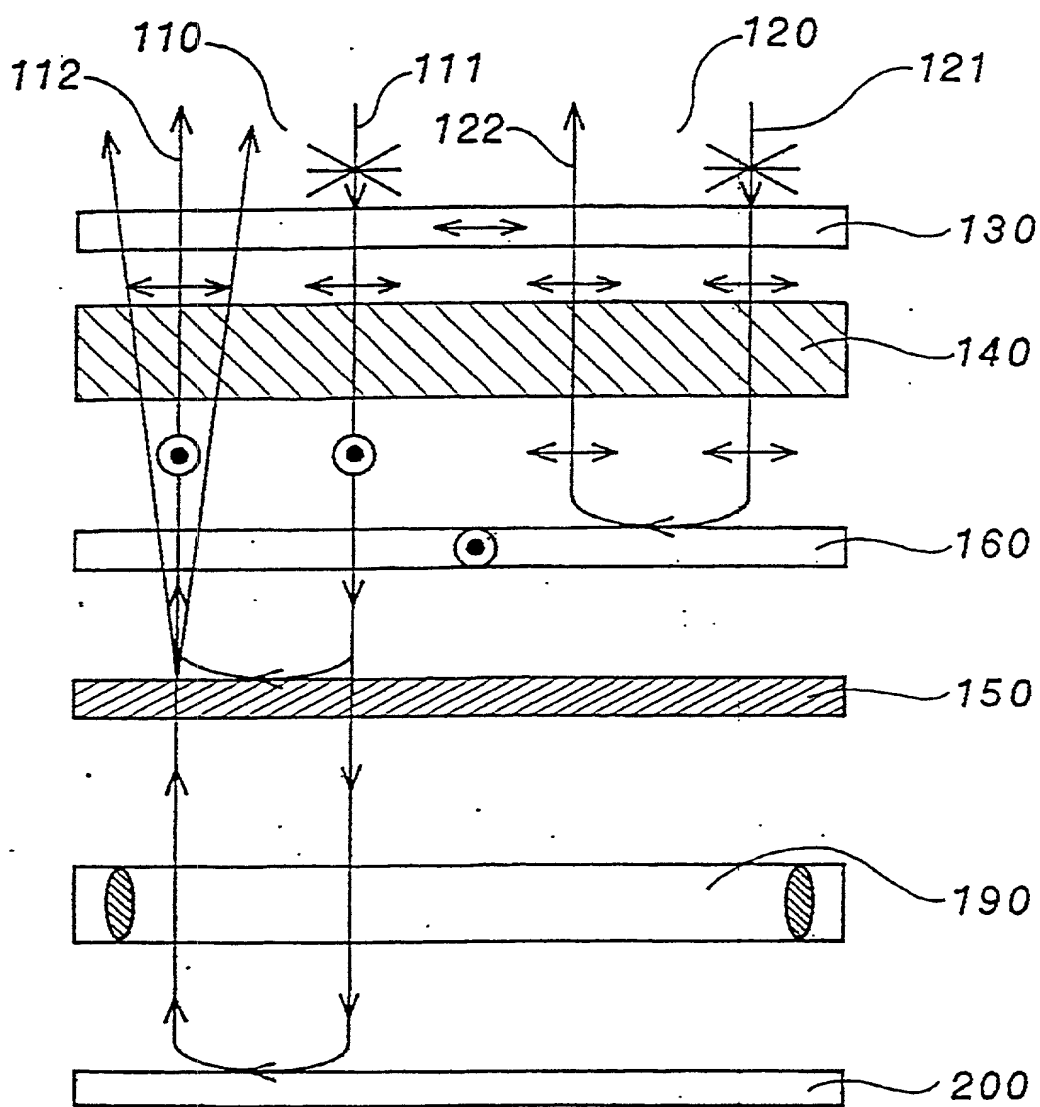

006290" 27020960

FIG. 3

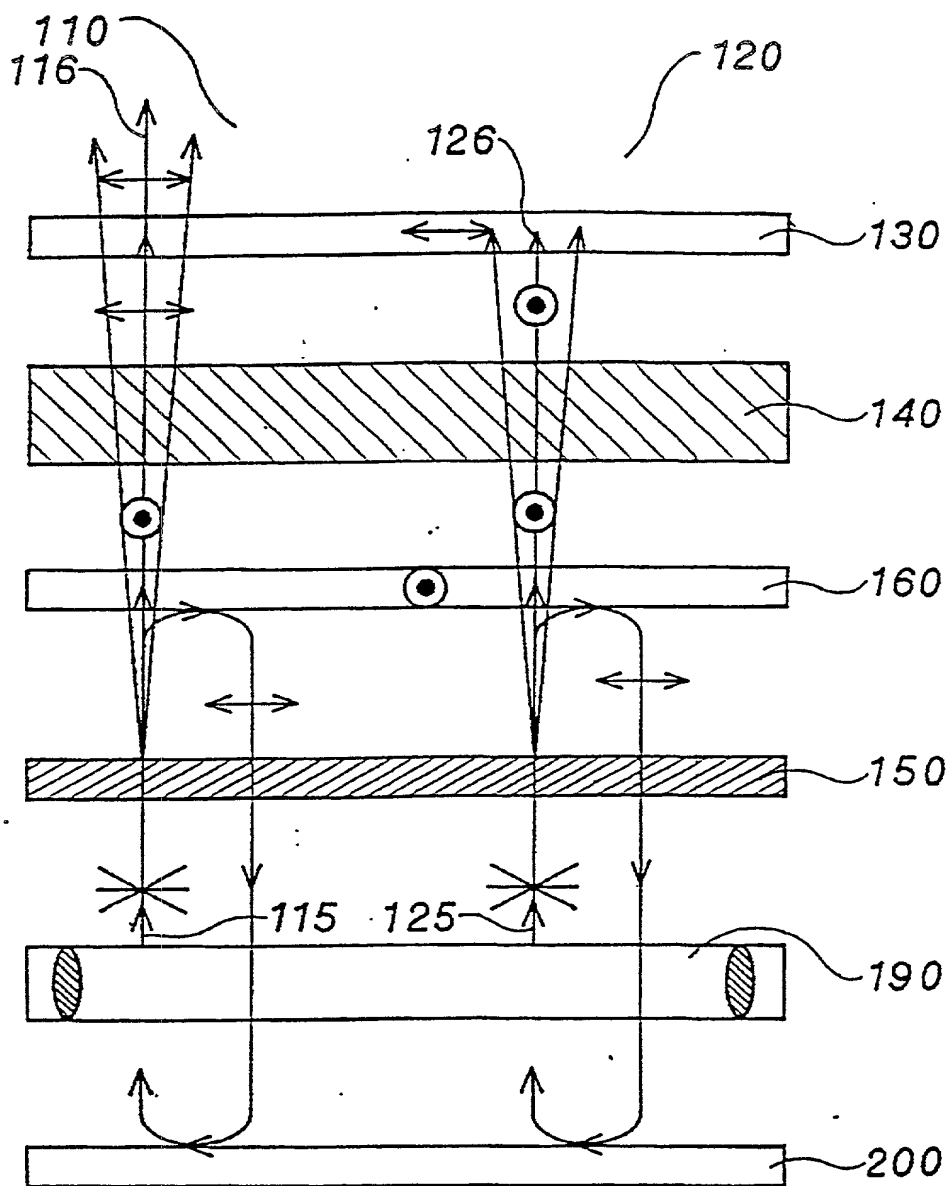


FIG. 4

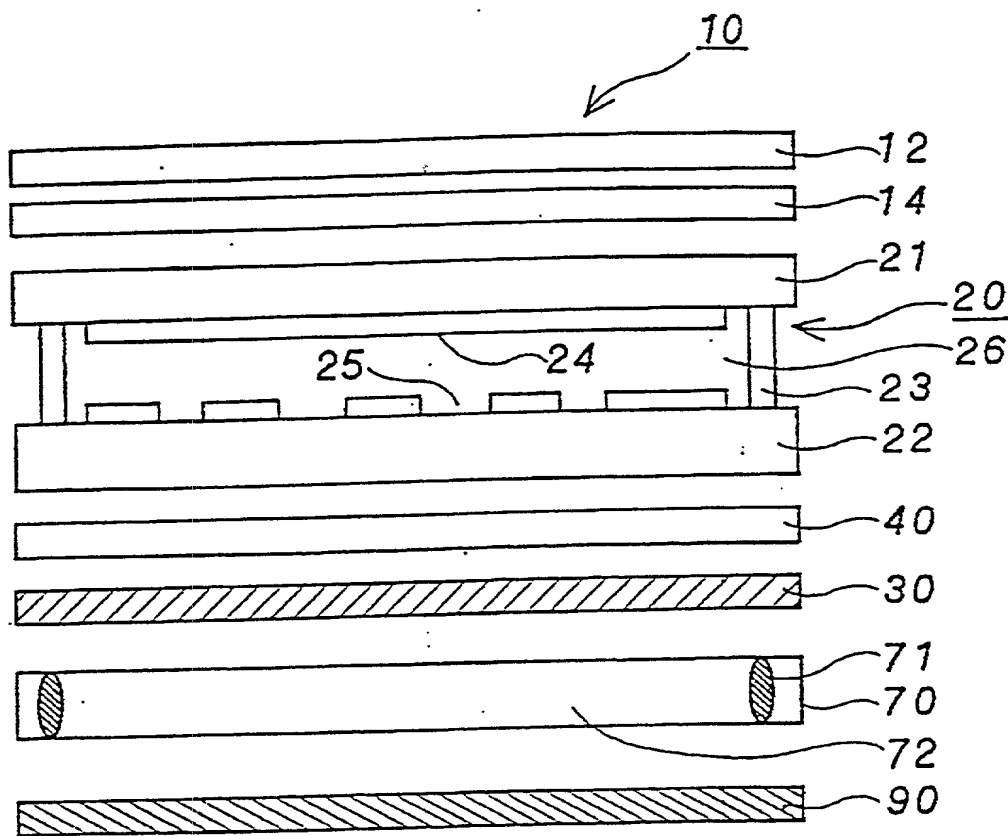


FIG. 5


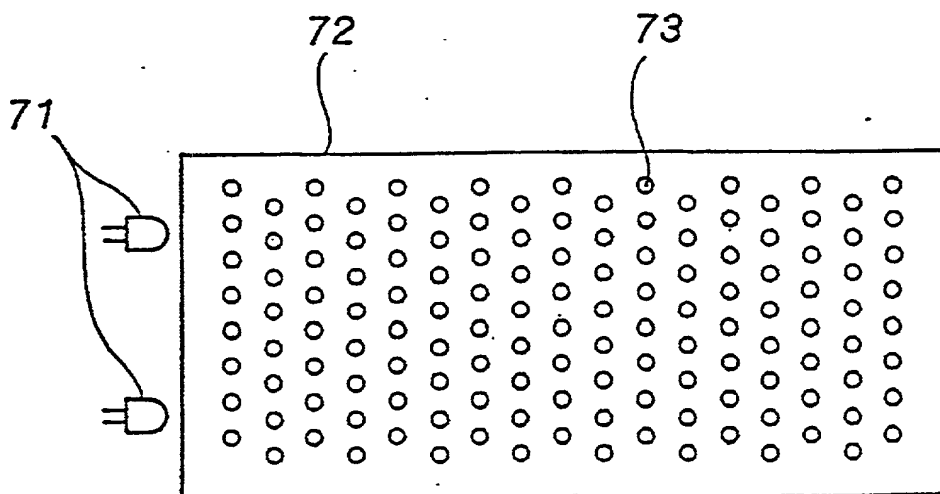


FIG. 6

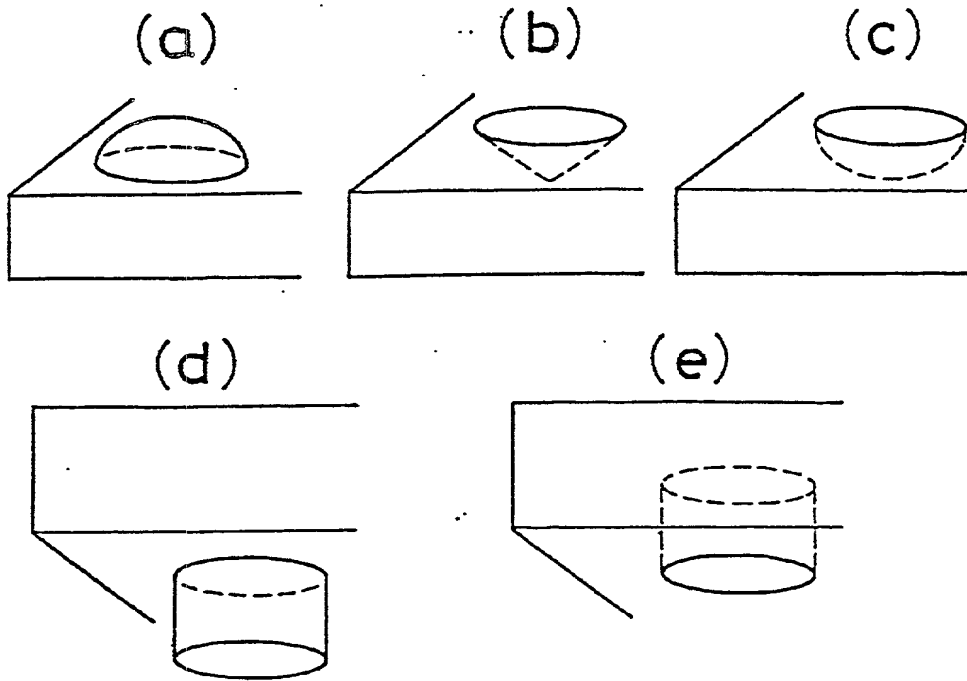

006290" 47020960

FIG. 7

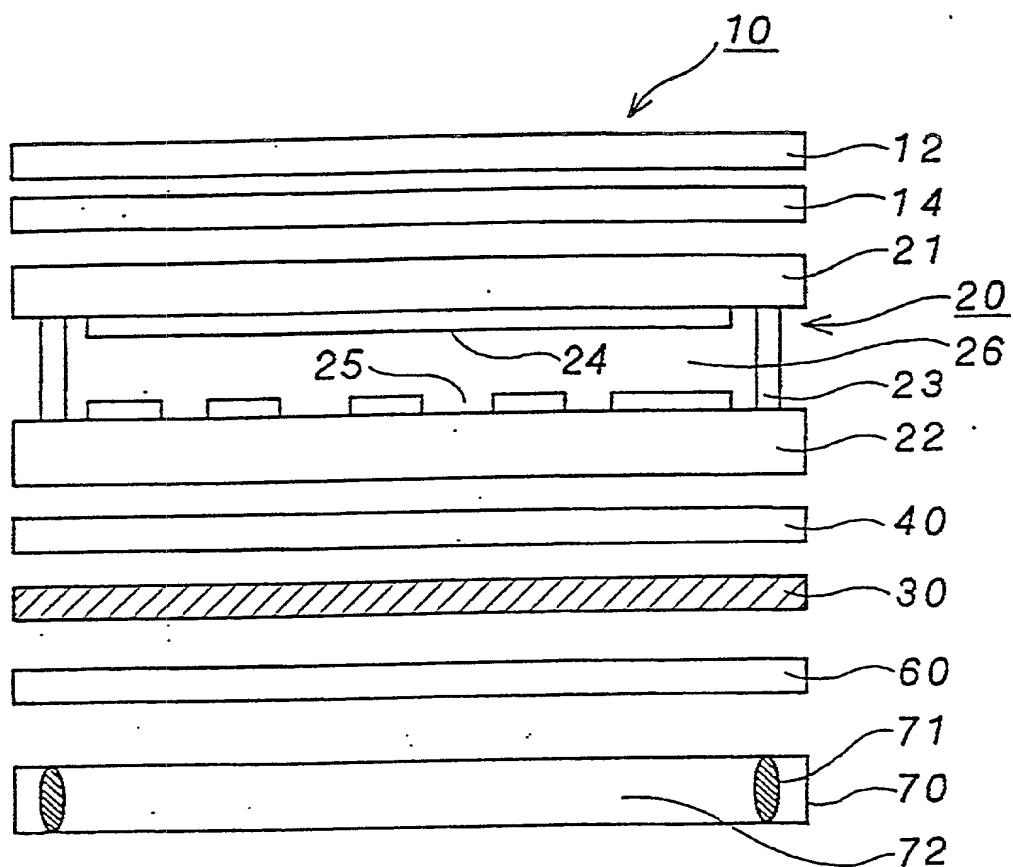


FIG. 8


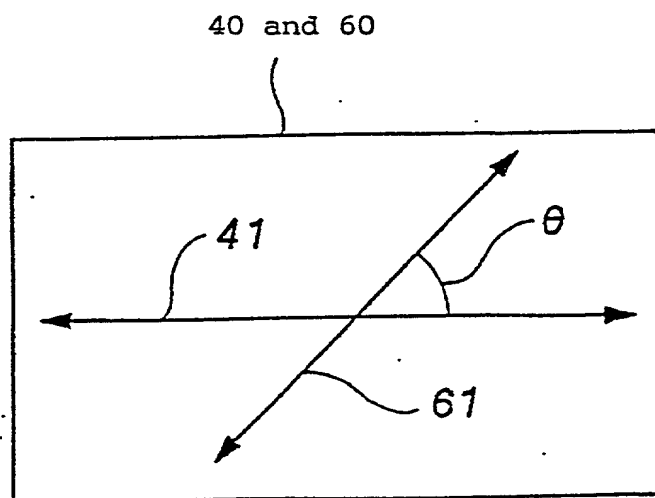


FIG. 9

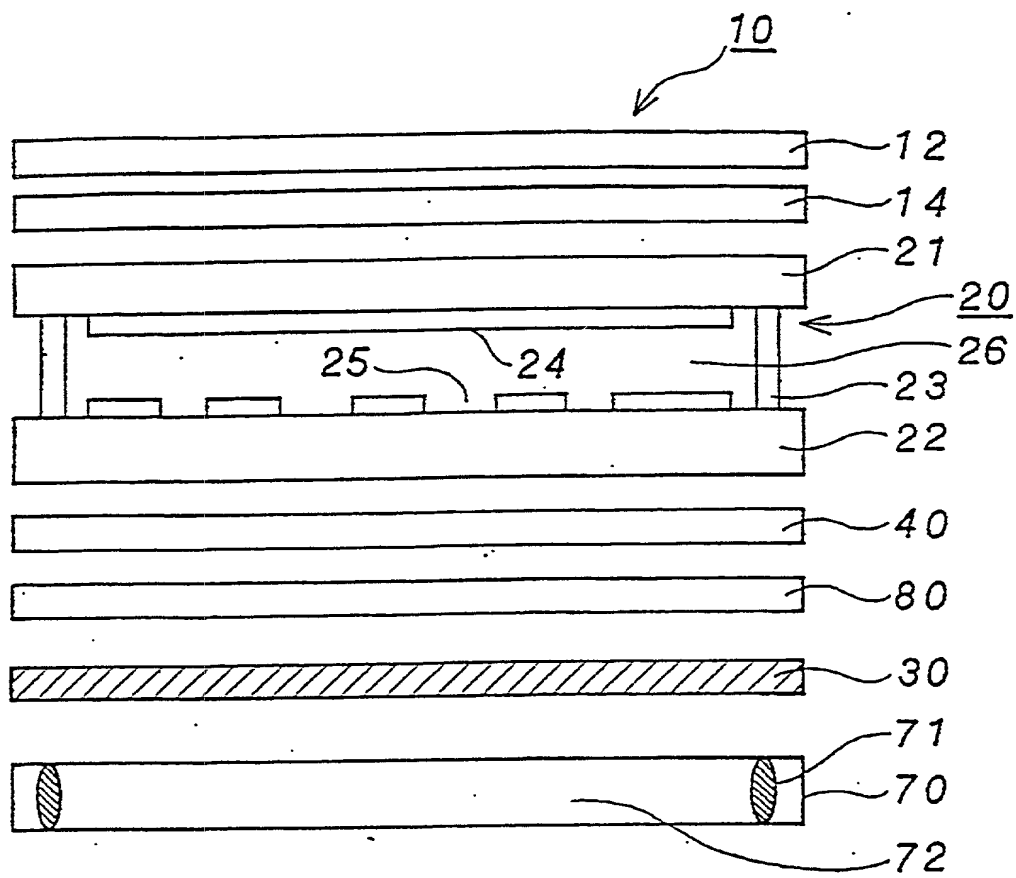

006290 27040960

FIG. 10



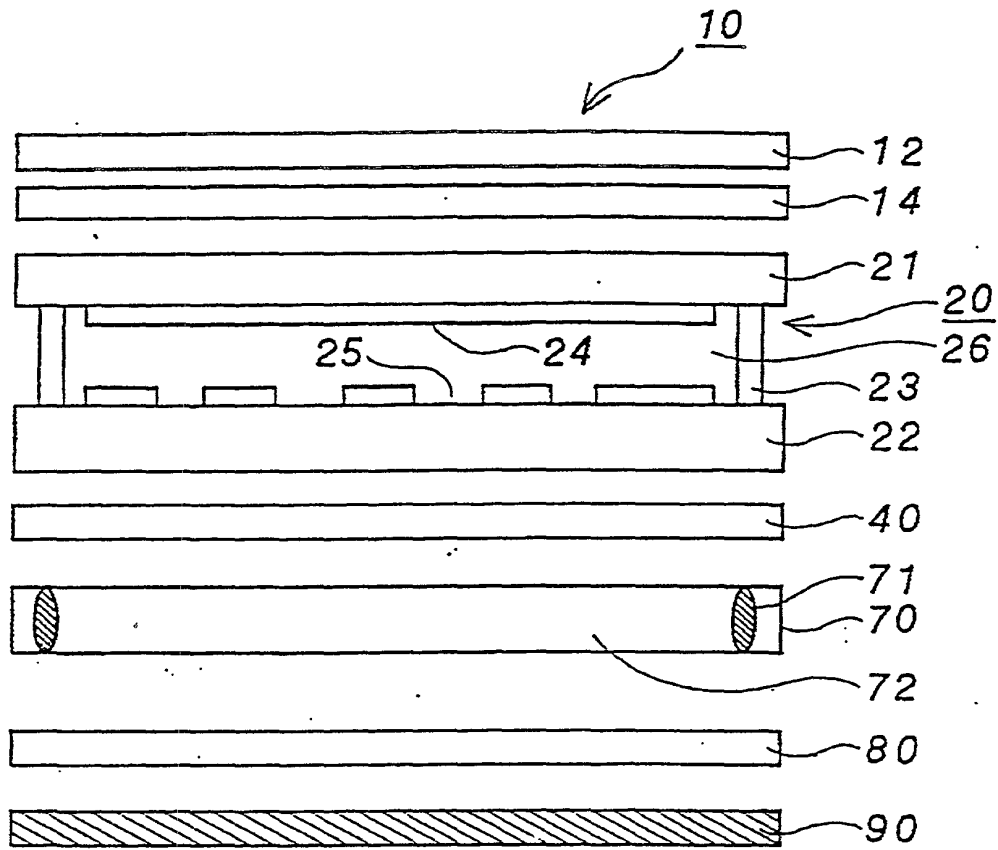


FIG. 11

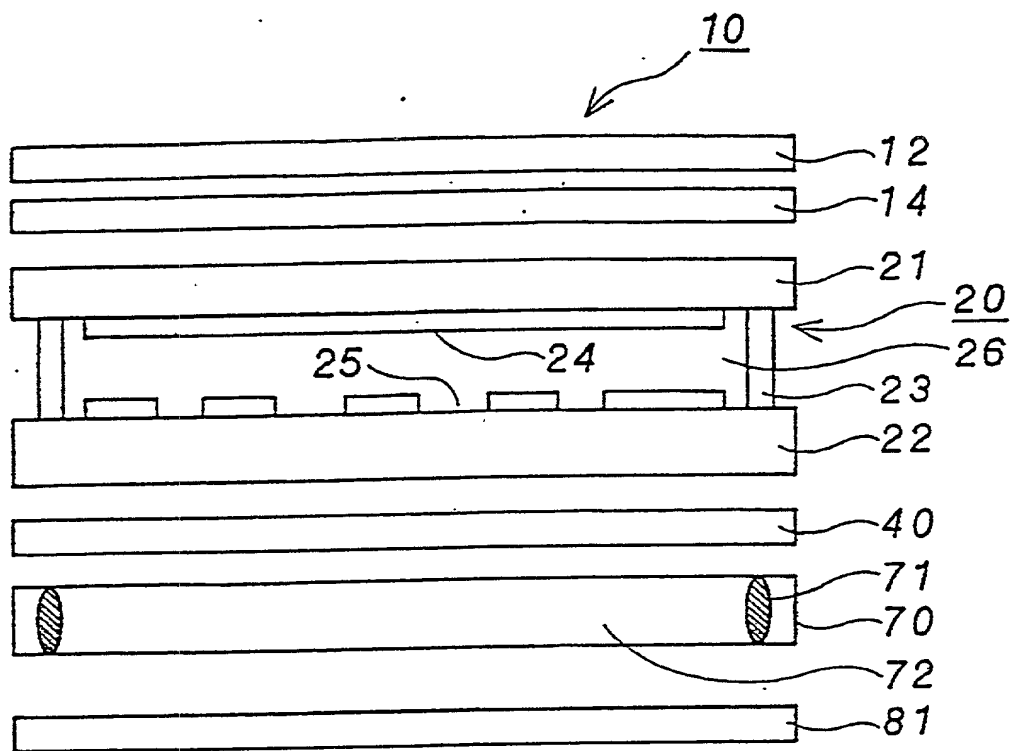

006290" 47020960


FIG. 12

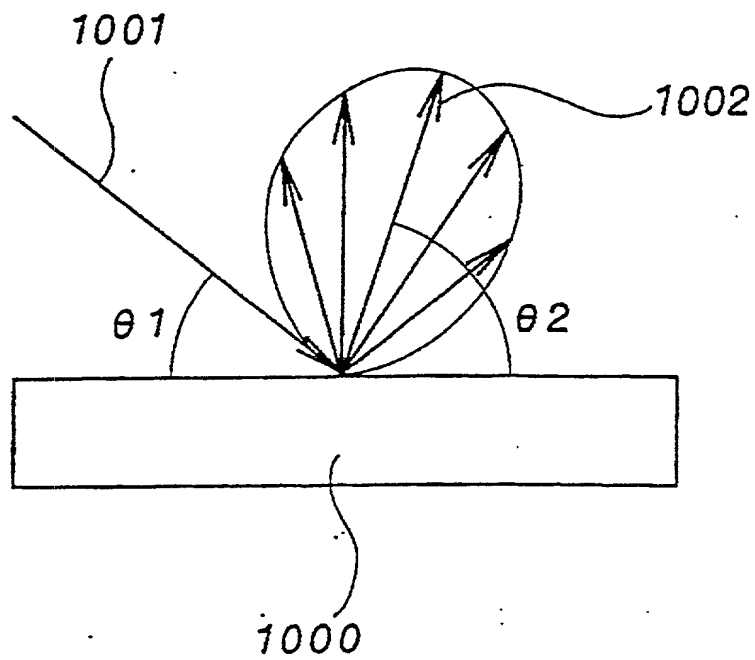


006290" / T040960

FIG. 13

(a)

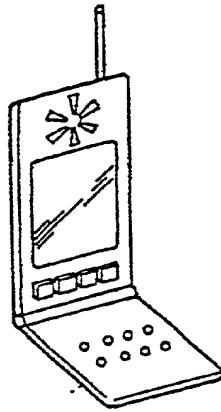

(b)

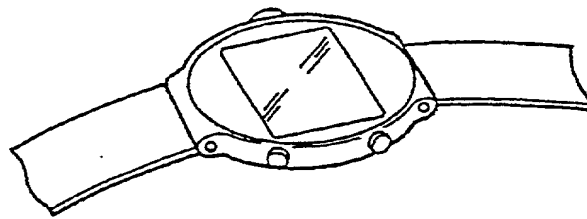

(c)

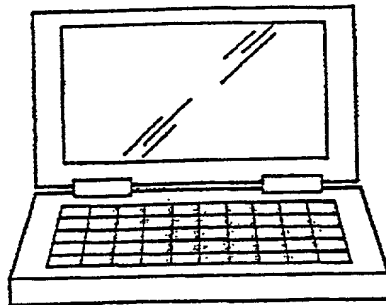


FIG. 14

PRIOR ART


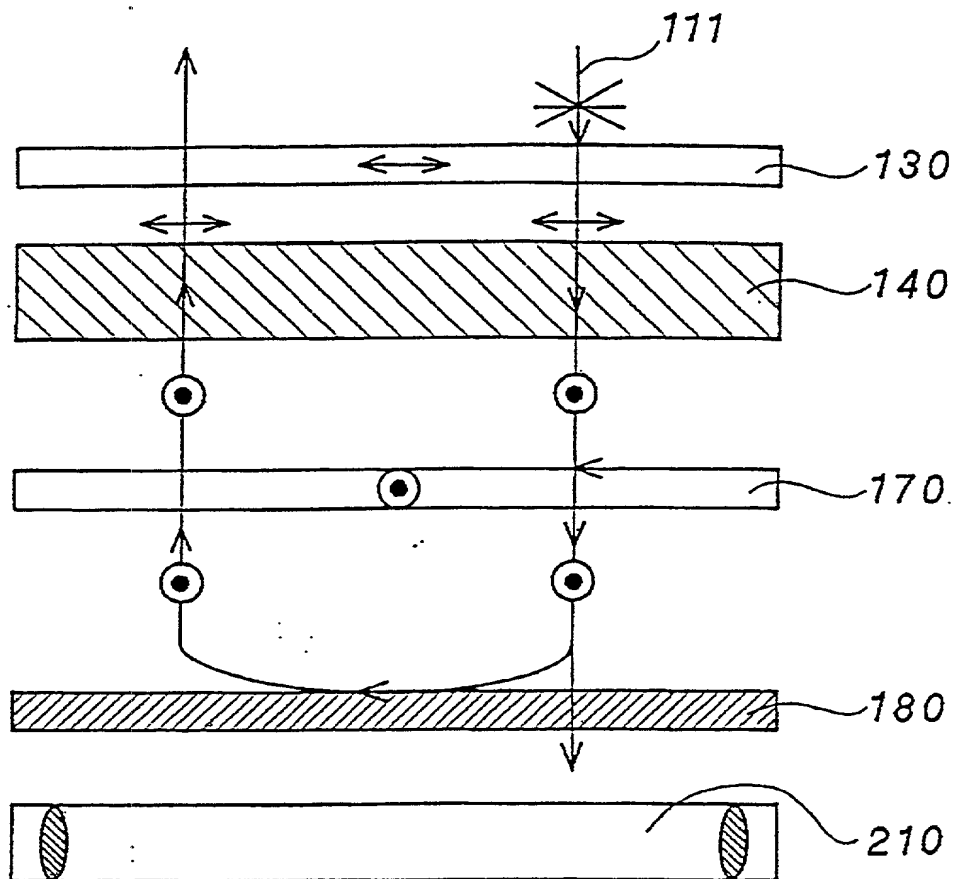


FIG. 15

PRIOR ART

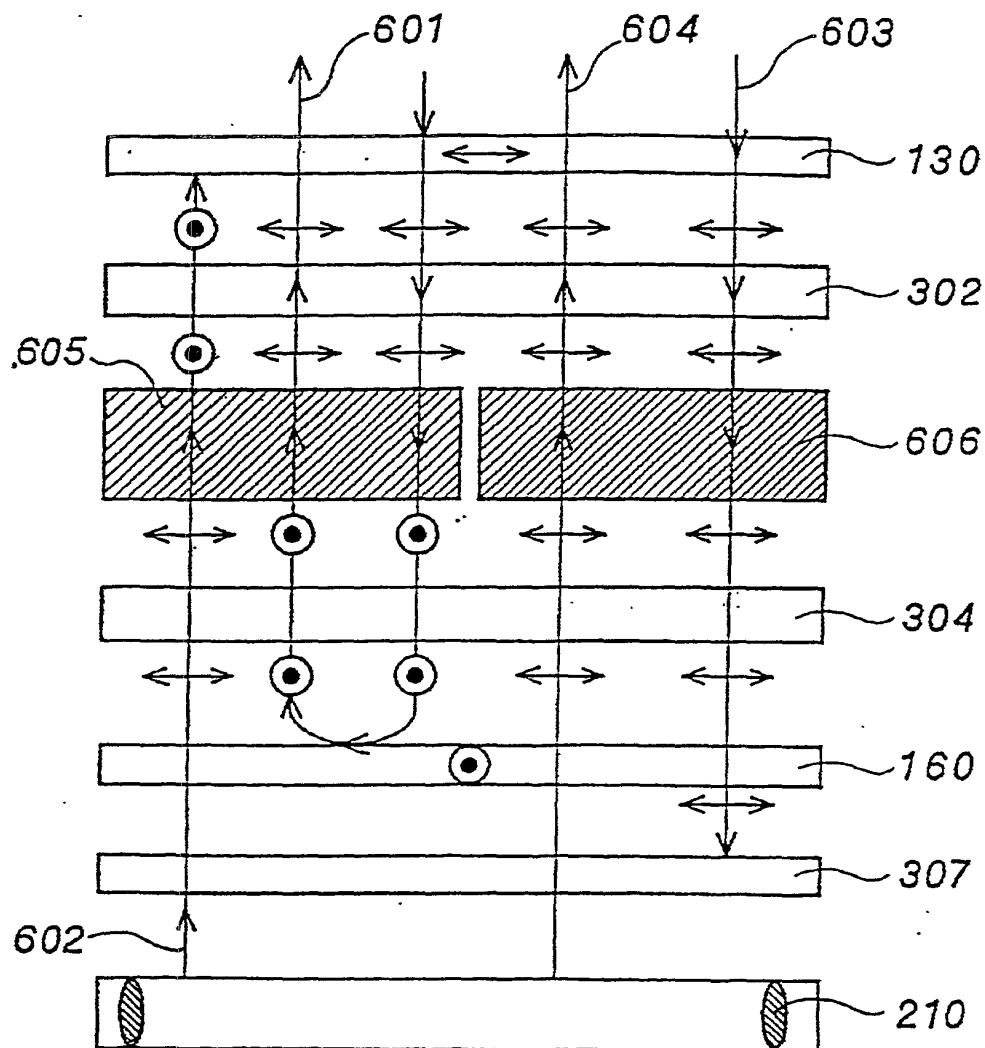

005290 27040960

Seiko Epson Ref. No.: FP03177US

Attorney's Ref. No.: 9319S-000073

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は、下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

表示装置及びそれを用いた電子機器DISPLAY DEVICE AND ELECTRONIC APPARATUS EMPLOYING THE SAME

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

- ☒ 1998年9月18日に提出され、米国出願番号または特許協定条約 国際出願番号を 09/157,255 とし、（該当する場合） _____ に訂正されました。

- ☒ was filed on September 18, 1998 as United States Application Number or PCT International Application Number 09/157,255 and was amended on _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも1ヶ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

| | | | |
|----------|-----------|------------------------|--------------------------|
| 9-253972 | Japan | 18/September/1997 | <input type="checkbox"/> |
| (Number) | (Country) | (Day/Month/Year Filed) | |
| (番号) | (国名) | (出願年月日) | |
| 10-16242 | Japan | 28/January/1998 | <input type="checkbox"/> |
| (Number) | (Country) | (Day/Month/Year Filed) | |
| (番号) | (国名) | (出願年月日) | |

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119 (e) of any United States provisional application(s) listed below.

| | | | |
|-------------------|---------------|-------------------|---------------|
| (Application No.) | (Filing Date) | (Application No.) | (Filing Date) |
| (出願番号) | (出願日) | (出願番号) | (出願日) |

私は下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1章56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application:

| | | |
|-------------------|---------------|--|
| (Application No.) | (Filing Date) | (Status: Patented, Pending, Abandoned) |
| (出願番号) | (出願日) | (現況: 特許許可済、係属中、放棄済) |
| (Application No.) | (Filing Date) | (Status: Patented, Pending, Abandoned) |
| (出願番号) | (出願日) | (現況: 特許許可済、係属中、放棄済) |

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私が入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration**(日本語宣言書)**

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも1ヶ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

10-206784Japan22/July/1998

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

☐

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)

☐

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119 (e) of any United States provisional application(s) listed below.

(Application No.)

(Filing Date)

(Application No.)

(Filing Date)

(出願番号)

(出願日)

(出願番号)

(出願日)

私は下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application:

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私が入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状： 私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

G. Gregory Schivley, (Reg. 27,382)
Bryant Wade, (Reg. 40,344)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

G. Gregory Schivley, (Reg. 27,382)
Bryant Wade, (Reg. 40,344)

書類送付先：

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303

Send Correspondence to:

Harness, Dickey & Pierce, P.L.C.
P.O. Box 828
Bloomfield Hills, Michigan 48303

直接電話連絡先： (名前及び電話番号)

Harness, Dickey & Pierce, P.L.C.
(248) 641-1600

Direct Telephone Calls to: (name and telephone number)

Harness, Dickey & Pierce, P.L.C.
(248) 641-1600

唯一または第一発明者名

飯島 千代明

Full name of sole or first inventor

Chiyoaki IIJIMA

発明者の署名

飯島千代明 日付

1998年10月27日

Inventor's signature

Chiyoaki Iijima

Date

October 27, 1998

住所

日本国

長野県 伊那市

Residence

Ito-shi, Nagano-ken, Japan

国籍

日本

Citizenship

Japan

私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号
セイコーエプソン株式会社内

Post Office Address

c/o Seiko Epson Corporation
3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者の署名

日付

Second inventor's signature

Date

住所

日本国

Residence

, Japan

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)